

Group 2

(6)
D2

STATE OF OKLAHOMA
TEXAS COUNTY
PUBLIC SERVICE/PIPELINE CROSSING
LINE INSTALLATION

(Revised February 2026)

We, the undersigned, hereby petition the Texas County Board of County Commissioners to grant a permit for a public service, pipeline crossing, or line installation as described below and in accordance with the provisions as listed.

PUBLIC SERVICE/PIPELINE OWNER

Name NextCity Networks Oklahoma, LLC
Contact Vanessa Montiel
Address 700 universe blvd
City Juno beach State FL Zip 33408
Phone 305-213-5771

CONSTRUCTION COMPANY

Name Utilities One, Inc
Contact Erin Dugan
Address 300 W Somerdale Rd, Suite 5E
City Voorhees Township State NJ Zip 08043
Phone 720-600-1132

TYPE OF INSTALLATION

Electric Gas Oil Water Telephone Sewer Other Fiber Optic Cable

The installation will be made in the following manner:

Boring Pushing Overhead Crossing Other Trench

A permit to erect, construct and maintain a 432ct foc w/ (2) 2" conduit along, upon and across the hereinafter said county highway or road for the purpose of transporting, selling, and using fiber optic communications. A plat shall be attached clearly illustrating work to be performed and further described as follows:

LOCATION:

Start point in the NW Qtr. of the NW Qtr. of Section 35 Township 1 North Range 14 East
Crossing or parallel to county road number Rd HH
Ending point in the NW Qtr. of the NW Qtr. of Section 32 Township 1 North Range 15 East

PIPELINES

Size _____
Alloy/Material _____
Contents _____
Mfg. Test Pressure _____
Working Pressure _____
Max. Operating Pressure _____

ELECTRIC

Voltage _____
Conductor Size _____
Type of Structure _____
Ruling Span _____

COMMUNICATIONS

Wires/Pairs/Strands 432
Gauge .5
Cable Type Fiber Optic Cable

CASING

Size 2" Conduit
Alloy/Material HDPE
Wall Thickness SDR11

If granted, this permit is subject to the following conditions, requirements, and covenants, to wit:

- 1 Applications for road crossing must be submitted to the County Clerk no later than 5 days before a meeting of the Board of County Commissioners with a check for the amount of permit made payable to the TEXAS County Commissioners. The petitioner/contractor shall contact The County Commissioners Office at the completion of crossing for an onsite inspection.
**To: Texas County Commissioners
PO Box 197 319 N Main. St.
Guymon, OK. 73942**
- 2 The applicant must agree to hold Texas County harmless for any damage or injury to persons or property caused by or resulting from the construction, maintenance, operation, or repair of the facilities on, under, or over the County right-of-way. The petitioner/contractor will be responsible for any damage resulting from deviation of the plat.
- 3 All crossings shall be bored on all roads.
- 4 The petitioner/contractor shall furnish all flagmen, lights, barricades, and warning signs meeting all laws and regulations, including those in the “Manual or Uniform Traffic Control Devices” appropriate for the construction project. The petitioner/contractor agrees to keep the road open to traffic unless approved by the Board of County Commissioners. At the conclusion of such work, the right-of-way must be cleaned up and left in a presentable condition.
- 5 In some cases, the petitioner/contractor shall post a performance bond in an amount to be determined by the Board of County Commissioners. Necessity for such bond will be determined by the Board of County Commissioners and the bond will be held in the County Treasurers office until the right-of-way is in a presentable condition.
- 6 When notified to do so by the Board of County Commissioners the petitioner/contractor agrees at their expense to make all changes in the facility on County right-of-way.
- 7 Aerial Facilities-Clearance above the traffic lanes of the road at all aerial pole line crossings shall comply with applicable safety codes and will not be less than 20 feet. All poles, posts, studs, fixtures, down guys, wires, and other appurtenances must be kept in good repair at all times and free from weeds and brush within a 5 foot area of the installation. These facilities, when paralleling the roadway, shall be single pole line construction and located within 3 feet of the fence line, if a fence exists. If no fence exists the right-of-way line shall be located by an Oklahoma Registered Surveyor at the petitioner’s expense and a copy provided to the Board prior to construction. All crossings shall be as nearly perpendicular as possible. Facility shall not interfere with the natural flow line of waterways or ditch.
- 8 Underground Facilities- All shall be a minimum of 5 feet below the elevation of the centerline of the road, but not less than 4 feet below the bottom of the ditch. Crossings shall be encased from right-of-way line to right-of-way line and be vented off the right-of-way lines. Concrete caps 4’ wide and 6” deep may be required from edge of road to fence line. Identification markers shall be installed at each right-of-way line directly above the facility. The markers must identify the owner’s name, address, telephone number, size of facility, and emergency contact number in compliance with the APWA Uniform Color Code for marking. All underground electric cable crossings must be placed in a conduit

Permit Approval

The undersigned Board of County Commissioners do hereby grant the crossing described in the supplication herein above set forth; provided that, the same shall be subject to the terms and conditions of the application incorporated herein by this reference.

Approved/Disapproved on this 8th Day of June, 2026
County Dist # 2

Board of County Commissioners

Donald Edwards
Chairman



Vice-Chairman

D W Sledge
Member

Attest: *Wendy Johnson*
County Clerk/Deputy

Dated: June 8, 2026

CERTIFICATE OF COMPLIANCE
(Utility Permit # 147-25-26)

PLEASE NOTE: an officer must sign this Certificate of Compliance
of your firm or a Project Director.

I, the undersigned Logan Berlin / Utilities One, Inc., do hereby certify that I am
VP/GM OSP Construction (title), a person deemed qualified by the Permit Holder to inspect said
installation, and that I have personally inspected a utility pipeline facility and all drawings, plans and
specifications therefore; installed by Utilities One, Inc (permit holder) at
(give legal description):

Starting NE 1/4 of the NE 1/4. S 35, T1N, R14E / Ending NW 1/4 of the NW 1/4, S36, T1N, R14E

I further certify that I have read the provisions of the Facility and Pipeline Utility Permit Submitted by the
above Permit Holder to the Board of County Commissioners for installation of a line at the above location. I
further certify that, in my professional opinion, the facility line as installed, and the drawings, plans and
specifications therefore comply in all respects with the requirements of said Permit.

Signature

Title/Firm/Owner

Address

Telephone

Completion Date/Date of Inspection



Submit this form to
the Board of County Commissioners at the Texas County Courthouse
PO Box 197 or 319 N Main Street Suite 202, Guymon, Oklahoma 73942 within 24 Hours of completion of
facility or pipeline installation.

RESOLUTION FOR APPROVAL OF UTILITY PERMITS
(RESOLUTION # 147-25-26)

Dist. 2

WHEREAS, the Statutes of the State of Oklahoma [OKLA. STAT. Tit. 18, § 437.2 and 438.4 (1991) and OKLA STAT. Tit. 69, § 1401 (1991)] provide that rural electric cooperatives, telephone cooperative corporations and public utilities shall have the right-of-way and all easements pertaining thereto for the purpose of erecting poles and posts, attaching equipment wires and fixtures thereto and laying lines, pipes and conduits under the surface thereof.

WHEREAS, NextCity Networks Oklahoma, LLC has requested this Board's approval of placement of utility lines (poles, pipelines, telecommunication lines or power lines) within the County right-of-way at the following location, to-wit:

Along the south side of Rd HH; crossing Mile 29 Rd

WHEREAS, petitioner must meet all requirements of the permit.

THEREFORE, BE IT RESOLVED, the Board of County Commissioners of Texas County, Oklahoma, does hereby consent to the placement of a distribution line according to the requirements as set forth in the completed Permit Application attached. With the following special instruction to be included:

All requirements of the Permit must be met, and roads shall be bored and trenched on the back side of the right of way.

PERMIT # 147-25-26 Granted this 8th day of June 20 26.

BOARD OF COUNTY COMMISSIONERS

[Signature]
Chairman

Member
[Signature]
Member




ATTEST:

Wendy Johnson
Texas County Clerk



OK NORTH-6
RD HH (CR)
GUYMON, OK 73942
4/24/2026

REVISIONS		
REV	DATE	REVISION DESCRIPTION
A	3/13/2026	INITIAL SUBMITTAL
B	4/24/2026	PER CLIENT COMMENTS

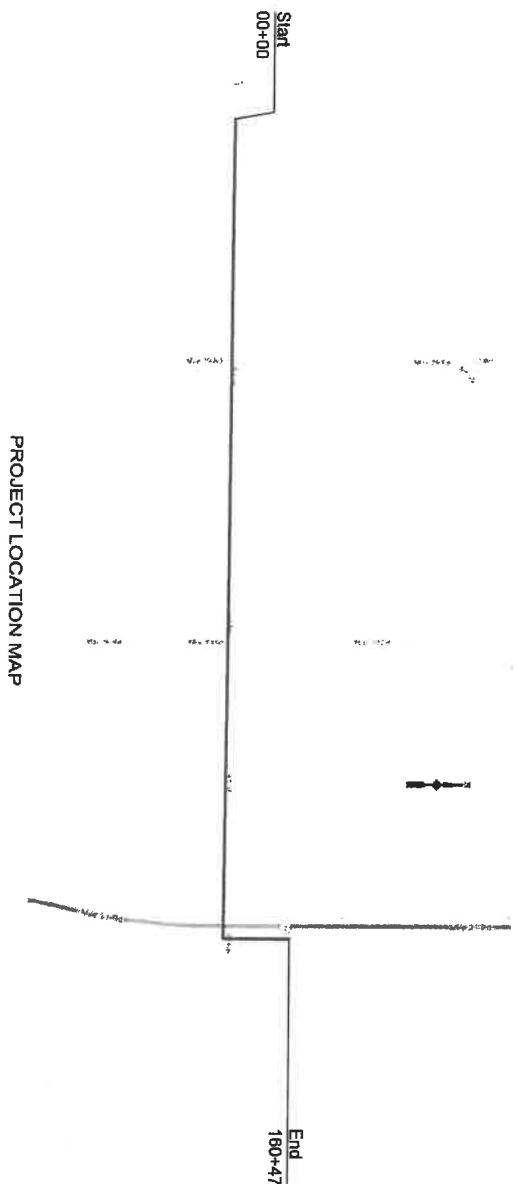

DRAWING INDEX	
SHEET #	SHEET TITLE
T-01	TITLE SHEET
T-02	GENERAL NOTES
T-03	CONSTRUCTION NOTES
T-04	BOM
T-05	KEY MAP
T-06	LEGEND
D-01 TO D-27A	DESIGN DRAWINGS & PROF
P-01 TO P-03	PROJECT DETAILS
TR-01	TOPS

PREPARED BY: 		PROJECT DESCRIPTION: PROPOSED PLACEMENT OF 3208A FT OF 12" HOPE SDR-11 CONDUIT & 1800' FT OF DURALINE 7AWAY 1841 WITH 17247 FT 492CT FIBER OPTIC CABLE ALONG RD LL WORK PERFORMED WILL INCLUDE 1368' INSTALLATION BY DIRECTIONAL BORE AND 1470' BY PLOWING/TRENCHING, EXCAVATION FOR (11) 36"x60"x28" HANDHOLES, (1) 36" X60"X48" HANDHOLES.	
PREPARED FOR: 		PROJECT CONTACTS: NCM CONSTRUCTION P.M.: NICK JONES 954-205-3813 NICKOLAS.JONES@NEXTENERGY.COM	
AUTHORITY HAVING JURISDICTION: TEXAS COUNTY: D-01 TO D-27A ODOT - C-24 TO D-27A PHILLIPS 66 PIPELINE, LLC: D-12, D-12A, D-15, D-15A, D-20, D-20A		UTILITIES ONE ENGINEERING P.M.: DAN MEANS 207-218-1223 DANM@UTILITIESONE.COM	
ENGINEER SEAL: 		Know what's below. Call 811 before you dig.	
SITE NAME: OK NORTH-6		APPROVED BY: DRAWN BY: CD VNO & OK NORTH-6 DATE: 02/26/26	
SITE TRACKING ID: NCM-2026-002 OK NORTH-6		SHEET NAME & NUMBER: RD HH (CR) GUYMON, OK 73942 T-01	